


Sexkants distansskruv M

polyamid PA 6.6, svart

omgivningstemp. min. -50°C — max. 100°C

Beställningsex: DSN M3060x8

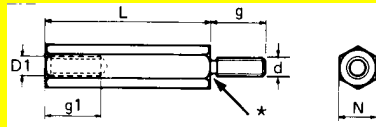

DSN PA 6.6

Benämning	L	d/D ₁	N	g ₁ min	g	Pris/100	Lev. kod	Normal Förp.
DSN M3060	X 6	M3	6	3,5	8	410:—	A	100
	X 8	M3	6	5	8	410:—	A	100
	X10	M3	6	7	8	410:—	A	100
	X12	M3	6	9	8	435:—	A	100
	X15	M3	6	10	8	435:—	A	100
	X18	M3	6	10	8	435:—	A	100
	X20	M3	6	10	8	435:—	A	100
	X25	M3	6	10	8	671:—	A	100
	X30	M3	6	10	8	671:—	A	100
	X35	M3	6	10	8	733:—	A	100
	X40	M3	6	10	8	733:—	A	100
	X50	M3	6	10	8	769:—	B	100

Benämning	L	d/D ₁	N	g ₁ min	g	Pris/100	Lev. kod	Normal Förp.
DSN M4080	X 7	M4	8	3,5	8	497:—	A	100
	X 8	M4	8	5	8	497:—	A	100
	X10	M4	8	7	8	497:—	A	100
	X12	M4	8	9	8	497:—	A	100
	X15	M4	8	10	8	497:—	A	100
	X18	M4	8	10	8	497:—	A	100
	X20	M4	8	10	8	497:—	A	100
	X25	M4	8	10	8	766:—	A	100
	X30	M4	8	10	8	766:—	A	100
	X35	M4	8	10	8	766:—	B	100
	X40	M4	8	10	8	887:—	B	100
	X50	M4	8	10	8	980:—	A	100